

Multipair Cable



MULTIPAIR CABLE (Multipair Foil-Shield/Braid Shield)

High density shielding cable specially designed and manufactured under the USA and Japanese Standard

Applications and Usage


- Interconnecting cable for Electronic Equipment, Telemetry and Instrumentation control.
- For intercom and sound systems and/or balance circuit providing longer run of cable
- For Sensing recording monitoring devices.
- An interconnecting cable for remote circuit control, telephones, security system and all low voltage circuits.

Product Highlights

- Strand Tinned Copper Conductor
- 100% Overlapped Foil + High Density Tinned Copper Wire Braid [Foil/Braid Shield Construction]
- High quality and durability PVC jacket, 70C
- High quality cable. Don't waste the time for cable reinstallation (save both time and unexpected expenses)
- Highly protect the interference entering the system

(A) Multipair Shield Cable Construction


Conductor Size : $\varnothing 0.16$ MM x 19 [AWG22] Strand Tinned Copper Wire
 Insulation: Polyethelence
 Shield : Aluminum Polyester Foil
 Drain Wire : $\varnothing 0.16$ MM x 19 [AWG22] Strand Tinned Copper Wire
 Jacket : 70C PVC Jacket

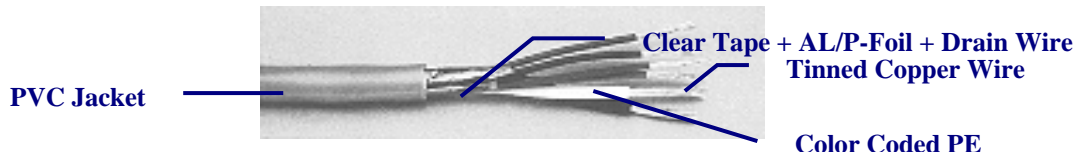

| Product Code | No.of Pair | Insulation Size | Shielding | Overall Jacket |
|--------------|------------|-------------------|-----------|--------------------|
| MP01000 | 1 | 1.70 ± 0.10 MM PE | AL/P-Foil | 5.40 ± 0.20 MM PVC |
| MP02000 | 2 | | | 7.40 ± 0.20 MM PVC |
| MP04000 | 4 | | | 9.00 ± 0.20 MM PVC |

(B) Multipair Foil/Briad Shield Cable Consturction

Conductor Size : $\varnothing 0.16$ MM x 19 [AWG22] Strand Tinned Copper Wire
 Insulation: Polyethelence
 Shield : Aluminum Polyester Foil + Tinned Copper Wire Braid
 Drain Wire : $\varnothing 0.16$ MM x 19 [AWG22] Strand Tinned Copper Wire
 Jacket : 70C PVC Jacket

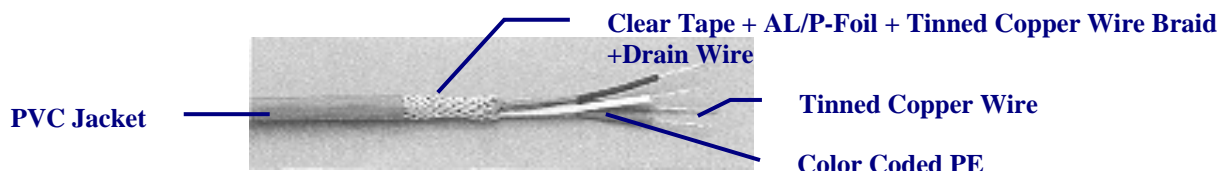

| Product Code | No.of Pair | Insulation Size | Shielding | Overall Jacket |
|--------------|------------|-------------------|-------------------------------|--------------------|
| MP01080 | 1 | 1.70 ± 0.10 MM PE | AL/P-Foil + 0.12MM x 80 TCWB | 5.90 ± 0.20 MM PVC |
| MP02112 | 2 | | AL/P-Foil + 0.12MM x 112 TCWB | 7.90 ± 0.20 MM PVC |
| MP04168 | 4 | | AL/P-Foil + 0.12MM x 168 TCWB | 9.50 ± 0.20 MM PVC |

Packing Information

Length : 100M/Coil
 : 500M/Coil

SUVANITJIT LIMITED PARTNERSHIP

22/40 Moo 6 Soi Watkumpang, Rama II Road, Sameredum, Bangkhuntien BANGKOK 10150

Tel: 02-4151126, 02-8984215 Fax: 02-4151126 Mobile: 01-7722376

Note: The specifications are subjected to change without prior notice.

Multipair Cable Spec Sheet.doc